

Detecting falls with X-Factor HMMs when the training data for falls is not available

Shehroz S. Khan^{a,*}, Michelle E. Karg, Dana Kulić^b, Dana Kulić^b, Jesse Hoey^a

^a*David R. Cheriton School of Computer Science
University of Waterloo, Canada*

^b*Department of Electrical and Computer Engineering
University of Waterloo, Canada*

Abstract

Identification of falls while performing normal activities of daily living (ADL) is important to ensure personal safety and well-being. However, falling is a short term activity that occurs rarely and infrequently. This poses a challenge to traditional classification algorithms, because there may be very little training data for falls (or none at all). This paper proposes an approach for the identification of falls using wearable device in the absence of training data for falls but with plentiful data for normal ADL. We propose three ‘X-Factor’ Hidden Markov Model (XHMMs) approaches. The XHMMs have “inflated” output covariances (observation models). To estimate the inflated covariances, we propose a novel cross validation method to remove “outliers” from the normal ADL that serves as proxies for the unseen falls and allow learning the XHMMs using only normal activities. We tested the proposed XHMM approaches on two activity recognition datasets and show high detection rates for falls in the absence of fall-specific training data. We show that the traditional method of choosing threshold based on maximum of negative of log-likelihood to identify unseen falls is ill-posed for this problem. We also show that supervised classification methods perform poorly when very limited fall data is available during the training phase.

Keywords: Fall Detection, Hidden Markov Models, X-Factor, Outlier Detection

*Corresponding author

Email addresses: s255khan@uwaterloo.ca (Shehroz S. Khan), mkarg@uwaterloo.ca (Michelle E. Karg, Dana Kulić), dkulic@uwaterloo.ca (Dana Kulić), jhoey@uwaterloo.ca (Jesse Hoey)

1. Introduction

Identification of normal Activities of Daily Living (ADL), for e.g. walking, hand washing, making breakfast etc., is important to understand a person's behaviour, goals and actions [1]. However, in certain situations, a more challenging, useful and interesting research problem is to identify cases when an abnormal activity occurs, as it can have direct implications on the health and safety of an individual. An important abnormal activity is the occurrence of a fall. However, falls occur rarely, infrequently and unexpectedly w.r.t. the other normal ADLs and this leads to either little or no training data for them [2]. The Centers for Disease Control and Prevention, USA [3], suggests that, on average, patients incur 2.6 falls per person per year. Recent studies by Debard et al. [4] and Stone and Skubic [5] suggest that even in a long term experimental set up only a few real falls may be captured. A typical supervised activity recognition system may misclassify 'fall' as one of the already existing normal activities as 'fall' may not be included in the classifier training set. An alternative strategy is to build fall detection specific classifiers that assume abundant training data for falls, which is hard to obtain in practice. Another challenge is the data collection for falls, as it may require a person to actually undergo falling which may be harmful, ethically questionable, and the falling incidences collected in controlled laboratory settings may not be the true representative of falls in naturalistic settings.

The research question we address in this paper is: *Can we recognise falls by observing only normal ADL with no training data for falls in a person independent manner?* We use the HMMs for the present task as they are very well-suited for sequential data and can model human motions with high accuracy [6]. Typically, a HMM can be trained on normal activities and maximum of negative of log-likelihood on the training data is set as a threshold to identify a fall as an outlier. However, choosing such a threshold may severely effect classifier's performance due to spurious artifacts present in the sensor data and most of the falls may be classified as normal activities. In this paper, we use the outlier detection approach to identify falls and present three X-Factor HMM based sequence classification approaches for detecting short-term fall events. The first and second method models individual normal activities by separate

HMMs or all normal activities together by a single HMM, by explicitly modelling the poses of a movement by each HMM state. An alternative HMM is constructed whose model parameters are the averages of the normal activity models, while the averaged covariance matrix is artificially “inflated” to model unseen falls. In the third method, a HMM is trained to model the transitions between normal activities, where each hidden state represents a normal activity, and adds a single hidden state (for unseen falls) with an inflated covariance based on the average of covariances of all the other states. The inflation parameters of the proposed approaches are estimated using a novel cross-validation approach in which the outliers in the normal data are used as proxies for unseen fall data. We present another method that leverages these outliers to train a separate HMM as a proxy model to detect falls. We also compare the performance of several supervised classification algorithms that use full data for normal activities but the number of falls are gradually increased in the training set and show that supervised classifiers perform worse when limited data for falls is available during training. This paper is a comprehensive extension of the work of Khan et al. [7] in terms of :

- Proposing two new models to detect unseen falls by (i) modelling transitions among normal activities to train a HMM and adding a new state to model unseen falls, and (ii) training a separate HMM on only the outliers in the normal activities data to model unseen falls.
- Data pre-processing, extraction of signals from raw sensor data, and number and type of features are different from Khan et al.[7].
- Studying the effect of changing the number of states on the proposed HMM methods for fall detection.
- Identifying similarity through experiments between the rejected outliers from the normal activities and the unseen falls.
- Additional experiments evaluating the effect of quantity of fall data available during the training phase on the performance of the supervised versions of the proposed fall detection methods and two other supervised classification methods.

2. Related Work

The research in fall detection spans over two decades with several recent papers [2, 8, 9] that discuss different methodologies, trends and ensuing challenges using body worn, ambient or vision based fall detection techniques. Several research works in fall detection are based on thresholding techniques [10] or supervised classification [2]. One of the major challenges in fall detection is the less availability of fall data [5]; therefore, such practice are difficult to use in practice. Keeping this view in mind, we survey techniques that attempt to detect falls by employing generative classification, outlier/novelty detection and one-class classification [11] based techniques.

Thome et al. [12] present a Hierarchical HMM (HHMM) approach for fall detection in video sequences. The HHMMs first layer has two states, an upright standing pose and lying. They study the relationship between angles in the 3D world and their projection onto the image plane and derive an error angle introduced by the image formation process for a standing posture. Based on this information, they differentiate other poses as ‘non-standing’ and thus falls can be distinguished from other motions. A two-layer HMM approach, *SensFall* [13], is used to identify falls from other normal activities. In the first layer, the HMM classifies an unknown activity as normal vertical activity or “other”, while in second stage the “other” activity is classified as either normal horizontal activity or as a fall. Tokumitsu et al. [14] present an adaptive sensor network intrusion detection approach by human activity profiling. They use multiple HMMs for every subject in order to improve the detection accuracy and consider the fact that a single person can have multiple patterns for the same activity. The data is collected using infra-red sensors. A new sequence of activity is fed to all the HMMs and likelihoods are computed. If all the likelihoods calculated from corresponding HMMs are not greater than pre-determined thresholds, then an anomaly is identified. Cheng et al. [15] present a fall detection algorithm based on pattern recognition and human posture analysis. The data is collected through tri-axial accelerometer embedded in the smartphones and thirty temporal features are computed. HMM is employed to filter out noisy character data and to perform dimensionality reduction. One-class SVM (OSVM) is applied to reduce false positives, followed by a posture analysis to

counteract the missed alarms until a desired accuracy is achieved.

Zhang et al. [16] trained an OSVM from positive samples (falls) and outliers from non-fall ADL and show that the falls can be detected effectively. Yu et al. [17] propose to train Fuzzy OSVM on fall activity captured using video cameras and to tune parameters using fall and some non-fall activities. Their method assigns fuzzy membership to different training samples to reflect their importance during classification and is shown to perform better than OSVM. Popescu [18] presents a fall detection technique that uses acoustic signals of normal activities for training and detects fall sounds from it. They train OSVM, one-class nearest neighbour (OCNN) classifier and One-class GMM classifier (that uses a threshold) to train models on normal acoustic signals and find that OSVM performs the best; however, it is outperformed by its supervised counterpart. Medrano et al. [19] propose to identify falls using a smartphone as a novelty from the normal activities and found that OCNN performs better than OSVM but is outperformed by supervised SVM.

The supervised and thresholding techniques for fall detection collect artificial fall data in a laboratory under non-naturalistic settings; however, such fall data may not be true representative of actual falls and learning with them may lead to over-fitting. To overcome the need for a sufficient set of representative ‘fall’ samples, we propose three ‘X-Factor’ HMM based approaches to identify falls across different people while learning only on data from normal activities.

3. Proposed Fall Detection Approaches

The HMM is a doubly stochastic process for modelling generative sequences that can be characterized by an underlying process generating an observable sequence. The HMMs are compactly represented as [20]

$$\lambda = (\pi, A, B) \quad (1)$$

where π is the initial hidden state distribution, A is the hidden state transition probability distribution and B is the observation symbol probability distribution in state j . The model follows a Markovian assumption i.e. the the current state at time t is

independent of all states $t - 2, \dots, 1$ given the state at $t - 1$ and an independence assumption i.e. the output observation at time t is independent of all the previous observations and states given the current state. Typically, two approaches are commonly applied to model human actions and activities using HMMs [6]:

- (i) *Modelling Poses*: train a HMM for a activity by explicitly modelling the poses of a movement by each state, or
- (ii) *Modelling Activities*: train a HMM for different activities by modelling each activity by a single state.

We consider both of these approaches to propose ‘X-Factor’ based models to identify falls when their training data is not available, which is discussed next.

3.1. Pose HMM

The traditional method to detect unseen abnormal activities is to model each normal activity using a HMM (by modelling the poses of a movement by each state), compare the likelihood of a test sequence with each of the trained models and if it is below a pre-defined threshold for all the models then identify it as an anomalous activity [7]. For fall detection, we model each normal activity i by an ergodic HMM which evolves through a number of k states. The observations $o_j(t)$ in state j are modelled by a single Gaussian distribution. Each model i is described by the set of parameters, $\lambda_i = \{\pi_i, A_i, (\mu_{ij}, \Sigma_{ij})\}$, where π_i is the prior, A_i is the transition matrix, and μ_{ij} and Σ_{ij} are the mean and covariance matrix of a single Gaussian distribution, $\mathcal{N}(\mu_{ij}, \Sigma_{ij})$, giving the observation probability $Pr(o_i|j)$ for the j^{th} HMM state. This method estimates the probability that an observed sequence has been generated by each of the i models of normal activities. If this probability falls below a threshold T_i for each HMM, a fall is detected. Typically, a HMM is trained for each normal activity on the full training data and the individual activity threshold is set as the maximum of the negative log-likelihood of the training sequences (we call this method as *HMM1*). If a new activity’s negative log-likelihood is below each of these thresholds, it is identified as a fall. Quinn et al. [21] present a general framework based on Switched Linear Dynamical Systems for condition monitoring of a premature baby receiving intensive care

by introducing the ‘X-factor’ to deal with unmodelled variation from the normal events that may not have been seen previously. This is achieved by inflating the system noise covariance of the normal dynamics to determine the regions with highest likelihood which are far away from normality based on which events can be classified as ‘not normal’. We extend this idea to formulate an alternate HMM (we call this as $XHMM1$) to model unseen fall events. This approach constructs an alternate HMM to model fall events by averaging the parameters of i HMMs and increasing the averaged covariances by a factor of ξ such that each state’s covariance matrix is expanded. Thus, the parameters of the X-Factor HMM will be $\lambda_{XHMM1} = \{\bar{\pi}, \bar{A}, \bar{\mu}, \xi\bar{\Sigma}\}$, where $\bar{\pi}$, \bar{A} , $\bar{\mu}$, and $\bar{\Sigma}$ are the average of the parameters π_i , A_i , μ_i and Σ_i of each i HMMs. Each of the i HMMs is trained on non-fall data obtained after removing outliers from the normal activities and these outliers serve as the validation set for optimizing the value of ξ using cross validation (see details in Section 4). For a test sequence, the log-likelihood is computed for all the HMM models (i HMMs representing i normal activities and the alternate HMM representing fall events) and the one with the largest value is designated as its class label.

3.2. Normal Pose HMM

Another method to identify abnormal activities is to model all the normal activities together using a single HMM and if a test sequence’s likelihood falls below a predefined threshold, it is identified as anomalous[22]. For fall detection, we group all the normal activities together and train a single HMM; where normal poses are modelled by each state. The idea is to learn the ‘normal concept’ from the labelled data. This method estimates the probability that the observed sequence has been generated by this common model for all the normal activities and if this probability falls below a threshold T , a fall is detected. Typically the maximum of negative log-likelihood on the training data is set as a threshold to detect unseen falls (we call this method $HMM2$). Similar to $XHMM1$, we propose to construct an alternative HMM to model the ‘fall’ activities whose parameters (λ_{XHMM2}) remain the same as the HMM to model non-fall activities together (λ) except for the covariance, whose inflated value is computed using cross validation (we call this method ($XHMM2$); see details in Section 4). For

a test sequence, the log-likelihood is computed for both HMM models (HMM representing non-fall activities and the alternate HMM representing fall events) and the one with the larger value is designated as its class label.

The intuition behind $XHMM1$ and $XHMM2$ approaches is that if the states representing non-fall activities are modelled using Gaussian distributions, then the fall events coming from another distribution can be modelled using a new Gaussian (X-factor) with larger spread but with the same mean as non-fall activities. The observations that are closer to the mean retain high likelihood under the original Gaussian distribution for the normal activities, whereas the X-factor will have higher likelihood for observations that are far away from the normal activities. To simplify the assumptions about unseen falls, other extra factors such as the mean and the number of states are not introduced in the proposed approaches.

3.3. Activity HMM

Smyth [23] addresses the problem of real-time fault monitoring, where it is difficult to model all the unseen fault states of a system and proposes to add a $(j + 1)$ novel hidden state (in a HMM) to cover all other possible states not accounted by the known j states. The novel state's prior probability is kept same as other known states and the density of the observable data given the unknown state is defined by using non-informative Bayesian priors. For detecting falls, we train a single HMM to model transitions of normal activity sequences, with parameters, $\lambda_{XHMM3} = \{\pi, A, \mu, \Sigma\}$, where each hidden state represents a normal activity, and add an extra hidden state to the model; its means and covariances are estimated by averaging the means and covariances of all other states representing the normal activities. The X-factor is introduced to vary the covariance of this novel state by a factor of ξ , which can be determined using cross validation (see Section 4). Adding a novel state to the existing HMM means adding a row and column to A to represent transitions to and from the state capturing unseen fall. However, this information is not available apriori. For fault detection application, Smyth [23] designs a 3 state HMM and added a novel 4^{th} state to model unknown anomalies and chooses the probability of remaining in the same state as 0.97 and distributes transition to other states uniformly. We use similar idea to choose proba-

bility of 0.95 to self transitions to fall events and the rest of the probability is uniformly distributed for transitions from fall events to normal activities. For transitions from different normal activities to falls, a probability of 0.05 is set (to capture the assumption that falls occur rarely) and the transition probabilities between different normal activities are scaled such that the total probability per row in the matrix A sums up to 1. Viterbi decoding [20] is employed on a test sequence to find the most likely hidden state that generated it, if it consists of the novel state, the sequence is classified as a fall or else a normal activity.

3.4. $HMM_{NormOut}$

As discussed in Section 3.1 and 3.2, some outliers are rejected from each of the normal activities that may arise due to artifacts in the sensor readings or mislabelling of training data. These rejected sensor readings from each normal activity are grouped together and two HMMs are trained, one each for non-fall activities and outlier activities. We call this approach as $HMM_{NormOut}$. The HMM model learnt on outlier activities may not be the true representative for falls but it models those activities that are non-falls.

4. Threshold Selection and Proxy Outliers

As discussed in Section 1, falls occur rarely and infrequently compared to normal activities; therefore, it is difficult to get labelled data for them. This may result in situations with abundant data for normal activities and none for falls. To detect falls using traditional HMM approaches ($HMM1$ and $HMM2$), typically, a threshold is set on the likelihood of the data given a HMM trained on this “normal” data. This threshold is normally chosen as the maximum of negative log-likelihood [22], and can be interpreted as a slider between raising false alarms or risking missed alarms [14]. A major drawback of this approach is that it assumes that the data for each normal activity is correctly labelled and sensor readings are non-spurious. This assumption can be detrimental for classification performance; any abnormal sensor reading or mislabelling of training data can alter this threshold and adversely effect the classification

performance. For the proposed approaches, another challenge is to estimate the parameter ξ for $XHMM1$, $XHMM2$ and $XHMM3$ in the absence of fall data during the training phase.

To address the above mentioned issues and finding appropriate ξ , we propose to use the deviant sequences (*outliers*) within the “normal” data. The idea is that even though the “normal” data may not contain any falls, it may contain sensor readings that are spurious, incorrectly labelled or significantly different. These outliers can be used to set ξ that are required for fall detection, thereby serving as a proxy for the fall data in order to learn the parameter ξ of the three XHMMs. To find the outliers, we use the concept of quartiles of a ranked set of data values that are the three points that divide the data set into four equal groups, where each group comprises of a quarter of the data. Given the log-likelihoods of sequences of training data for a HMM and the lower quartile (Q_1), the upper quartile (Q_3) and the inter-quartile range ($IQR = Q_3 - Q_1$), a point P is qualified as an outlier if

$$P > Q_3 + \omega \times IQR \quad || \quad P < Q_1 - \omega \times IQR \quad (2)$$

where ω represents the percentage of data points that are within the non-extreme limits. Based on ω , the extreme values of log-likelihood that represent spurious training data can be removed, that leads to the

1. computation of parameter ξ for the proposed $XHMM$ approaches, and
2. creation of a validation set comprising of outliers (proxies for falls) to help in estimating ξ for different XHMMs.

Figure 1 (a) shows the log-likelihood $\log Pr(O|\lambda_{running})$ for 1262 equal length (1.28 seconds) running activity sequences of the DLR dataset (see Section 5.1). Figure 1 (b) shows a box plot with the quartiles and the outliers (shown as $+$) for $w = 1.5$. Figure 1 (c) shows the same data as in Figure 1(a) but with the outliers removed.

We employ an internal cross-validation to train the three XHMMs using only the non-fall data, we first split the normal data into two sets: “non-fall” data and “outlier” data (see Figure 2). We do this using Equation 2 with a parameter ω that is manually set and only used for this initial split. For each activity, a HMM is trained on full

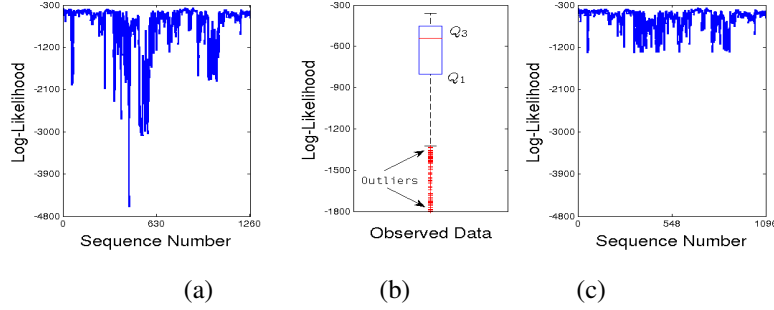


Figure 1: Log-Likelihoods – (a) before and (c) after outlier removal. (b) shows box-plot of the quartiles for this data and the outliers for $w = 1.5$

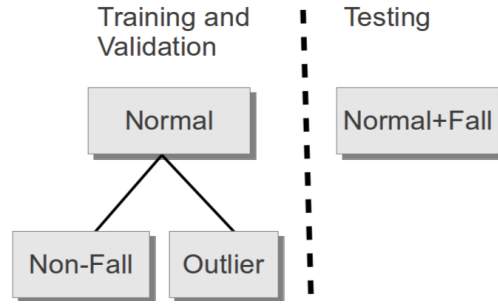


Figure 2: Cross Validation Scheme

normal data and based on ω , “outliers” are rejected from them and the remaining data is considered as “non-fall”. To optimize the covariance parameter, ξ , we use a K -fold cross validation: the HMMs are trained on $(\frac{K-1}{K})^{th}$ of the “non-fall” data, and tested on $(\frac{1}{K})^{th}$ of the “non-fall” data and on all the “outlier” data. This is done K times and repeated for different values of ξ . The value of ξ that gives the best averaged *gmean* over K -folds is chosen as the best parameter. Then, each classifier is re-trained with this value of parameter on the “non-fall” activities.

5. Experimental Design

5.1. Datasets

The proposed fall detection approaches are evaluated on the following two human activity recognition datasets.

1. German Aerospace Center (DLR) [24]: This dataset is collected using an Inertial Measurement Unit with integrated accelerometer, gyroscope and 3D magnetometers with sampling frequency of 100 Hz. The dataset contains samples taken from 19 people under semi-natural conditions. The sensor was placed on the belt either on the right/left side of the body or in the right pocket in different orientations. The dataset contains 7 activities: standing, sitting, lying, walking (up/downstairs, horizontal), running/jogging, jumping and falling. One subject did not perform fall activity and its data is omitted from the analysis.
2. MobiFall (MF) [25]: This dataset is collected using a Samsung Galaxy S3 device equipped with 3D accelerometer and gyroscope. The mobile device was placed in a trouser pocket in random orientations. Mean sampling of 87 Hz is reported for accelerometer and 200 Hz for the gyroscope. The dataset is collected from 11 subjects; eight normal activities are recorded in this dataset: step-in car, step-out car, jogging, jumping, sitting, standing, stairs (up and down joined together) and walking. Four different types of falls are recorded – forward lying, front knees lying, sideward lying and back sitting chair. Different types of falls are joined together to make one separate class for falls. Two subjects only performed fall activity and their data is removed from the analysis.

The DLR dataset is collected in semi-naturalistic settings; therefore, the ratio of falls to normal activities is quite small ≈ 0.0032 (26576 normal activities segments and 84 fall segments), whereas in the MF dataset this ratio is ≈ 0.0899 (5430 normal activities and 488 fall segments).

5.2. Data Pre-Processing

For the MF dataset, the gyroscope sensor has a different sampling frequency than the accelerometer and their time-stamps are also not synchronized; therefore, the gyroscope readings are interpolated to synchronize them with the accelerometer readings. Although the calibration matrix for the DLR data is available to rotate the sensor readings to the world frame, in our experiments we did not use it because it did not improve the results. For the MF dataset, orientation information is present but incorporating it

led to the deterioration of results. This observation is consistent with the work of de la Vega et al.[26] that suggest that activities can be detected without considering the orientations. Winter [27] suggests that for the walking activity, 99.7% of the signal power was contained in the lower seven harmonics (below 6Hz), with evidence of higher-frequency components extending up to the 20th harmonic. Beyond that frequency, the signal had the characteristics of ‘noise’, which can arise from different sources, such as electronic/sensor noise, spatial precision of the digitization process, and human errors. Therefore, for both the datasets, the sensor noise is removed by using a 1st order Butterworth low-pass filter with a cutoff frequency of 20Hz. The signals are segmented with 50% overlapping windows, where each window size is 1.28 seconds for DLR dataset and 3 seconds for MF dataset to simulate a real-time scenario with fast response. The reason that DLR dataset does not have the same windows size as MF dataset is that it contains short duration fall events. Therefore, when the window size is increased to 3 seconds, fall samples could not be extracted for many subjects and LOOCV will not work.

5.3. Feature Extraction

Most of the feature extraction techniques for activity recognition involve computing time domain, frequency domain, and statistical features from the sensor readings [28]. We extract the following five signals from each of the datasets:

1. Three acceleration readings a_x, a_y, a_z along the x, y and z directions,
2. Norm of acceleration, $a_{norm} = \sqrt{a_x^2 + a_y^2 + a_z^2}$ and gyroscope, $\omega_{norm} = \sqrt{\omega_x^2 + \omega_y^2 + \omega_z^2}$, where ω_x, ω_y and ω_z are the angular velocities in the x, y or z direction.

We extract 31 standard time and frequency domain features from these signals as shown in Table 1. Features are computed for each window for $XHMM3$. To extract temporal dynamics for $HMM1, HMM2, XHMM1, XHMM2$ and $HMM_{NormOut}$, each window is sub-divided into 16ms frames and features are computed for each frame.

#features	Type of feature
$f_1 - f_5$	Mean of $a_x, a_y, a_z, a_{norm}, \omega_{norm}$ [24]
$f_6 - f_{10}$	Maximum value of $a_x, a_y, a_z, a_{norm}, \omega_{norm}$ [24]
$f_{11} - f_{15}$	Minimum value of $a_x, a_y, a_z, a_{norm}, \omega_{norm}$ [24]
$f_{16} - f_{20}$	Standard Deviation of $a_x, a_y, a_z, a_{norm}, \omega_{norm}$ [24]
$f_{21} - f_{22}$	IQR of a_{norm}, ω_{norm} [24]
f_{23}	Normalized Signal Magnitude Area [29]
f_{24}	Normalized Average Power Spectral Density of a_{norm}
f_{25}	Spectral Entropy of a_{norm} [30]
f_{26}	DC component after FFT of a_{norm} [31]
f_{27}	Energy i.e. sum of the squared discrete FFT component magnitudes of a_{norm} [31]
f_{28}	Normalized Information Entropy of the Discrete FFT component magnitudes of a_{norm} [31]
$f_{29} - f_{31}$	Correlation between a_x, a_y, a_z

Table 1: Extracted Features.

5.4. HMM Modelling

For all the HMM based fall detection methods discussed in the paper, the observation model uses single Gaussian distribution, diagonal covariance matrix is used for each of the HMMs and the upper and lower values are constraint to 100 and 0.01 during the training. For optimizing the parameters ξ , a 3-fold internal cross validation is used. For all the HMMs methods except *XHMM3*, the following procedure is adopted:

- Each activity in the HMMs is modelled with 2/4/8 states, where each individual state represents functional phases of the gait cycle [32] or the “key poses” of each activity.
- Five representative sequences per activity are manually chosen to initialize the parameters. Initialization is done by segmenting a single sequence into equal parts (corresponding to the number of states) and computing μ_{ij} and Σ_{ij} for each part and further smoothing by BW with 3 iterations.
- The transition matrix A_i is ergodic (i.e. every state has transitions to other states) and initialized such that transition probabilities from one state to another are 0.025, self-transitions are set accordingly [23], and the actual values are learned by BW algorithm following initialization.
- The prior probabilities of each state, π , are initialized to be uniformly distributed (to sum across all states to 1) and further learned during BW.
- The likelihood for a test sequence is computed using the forward algorithm [20] and the classification decisions are taken based on them.

For *XHMM3*, the parameters μ_j and Σ_j and transition matrix are computed from the annotated data and no additional BW step is used. When a novel state is added, its parameters are estimated by averaging the means and covariances of all other states (with covariance further inflated using X-Factor) and transition matrix is re-adjusted (refer to Section 3.3). The prior probabilities of each state is kept uniform. The decision is taken using the Viterbi algorithm [20] which finds the most likely hidden state that produces the given observation.

5.5. Performance Evaluation and Metric

To evaluate the performance of the proposed approaches for fall detection, we perform leave-one-subject-out cross validation (LOOCV) [33], where *only* normal activities from $(N - 1)$ subjects are used for training and the N^{th} subject’s normal activities and falls are used for testing. This process is repeated N times and the average performance metric is reported. This evaluation is person independent and demonstrates the generalization capabilities as the subject who is being tested is not included in training the classifiers. The different values of ξ used in internal cross validation for $XHMM1$, $XHMM2$ and $XHMM3$ are $[1.5, 5, 10, 100]$. The value of ω is set to 1.5 for obtaining outliers from the normal activities.

Conventional performance metrics such as accuracy, precision, recall etc may not be very useful when classifiers are expected to observe a skewed distribution of fall events w.r.t. normal activities. We use the geometric mean (*gmean*) as the performance metrics because it measures the accuracies separately on each class i.e. it combines True Positive Rates (TPR) and True Negative Rates (TNR) and given by $\sqrt{TPR * TNR}$. An important property of *gmean* is that it is independent of the distribution of positive and negative samples in the test data. We also use two other performance metrics, fall detection rate (FDR) (or the true positives) and false alarm rate (FAR) (or the false positives) to better understand the performance of the proposed fall detection classifiers. A fall detection method that gives high *gmean*, high FDR and low FAR is considered to be better than others.

6. Results

6.1. Training without fall data

In this experiment, we compare the performance of the fall detection methods discussed in Section 3. $HMM1$ and $HMM2$ are trained on full ‘normal’ data, while the proposed three $XHMMs$ are trained on “non-fall” data, but they make use of full ‘normal’ data to optimize their respective parameters. Tables 2 shows the performance of the proposed fall detection methods in the absence of training data for falls on both the datasets. Except for $XHMM3$, where the number of states equals the number of

labelled normal activities plus an additional state for modelling falls, the number of states are varied for all other fall detection methods to study the change in performance by increasing the complexity of the models. The number of states tested are 2, 4 and 8 for both the data sets. We observed that increasing the number of states do not significantly improve the performance of any methods. Large number of states increase the training time for the models significantly. Therefore, we choose 4 states as the optimum for this and subsequent experiments. Table 2 shows that for both the DLR and MF datasets, $HMM1$ and $HMM2$ failed to detect any (or most of the) falls. For DLR dataset, $XHMM3$, and $XHMM1$ show the highest $gmean$ in comparison to other methods. $HMM_{NormOut}$ performs worse than the three $XHMM$ s but better than HMM s. $XHMM2$ has the highest FDR but at the cost of high FAR . For the MF dataset, $XHMM2$ performs the best, $XHMM1$ and $XHMM3$ did not perform well because they classify most falls as step-in car and sitting. The reason for their poor performance is that the fall signals collected in this dataset contain sensor readings after the subject has hit the ground. Therefore, the fall data has some stationary values after the falling action has occurred. After creating overlapping windows, some of them may contain stationary values that are likely to be classified as one of the static activities. To understand the statistical stability of the proposed methods, we plot the mean values of $gmean$ along with error bars (see Figure 3) representing standard deviation. Figure 3 shows that for both the DLR and MF dataset, all the proposed $XHMM$ methods outperform $HMM1$, $HMM2$ and $HMM_{NormOut}$.

Due to skewed distribution of falls in both the datasets, the standard deviation for the $gmean$ could be higher because a small number of misclassifications can vary the $gmean$ greatly. This experiment shows that training HMMs on full ‘normal’ data for detecting unseen falls, and setting a threshold as the maximum of negative log-likelihood on training sequences is not the right approach and better models can be built when outliers from the ‘normal’ datasets are removed and covariances of the X-Factor based HMMs are optimized.

Method	DLR			MF		
	<i>gmean</i>	<i>FDR</i>	<i>FAR</i>	<i>gmean</i>	<i>FDR</i>	<i>FAR</i>
<i>HMM1</i>	0	0	0.001	0.092	0.016	0.005
<i>HMM2</i>	0	0	0.0003	0	0	0.002
<i>XHMM1</i>	0.854	0.822	0.096	0.290	0.094	0.024
<i>XHMM2</i>	0.784	0.965	0.360	0.810	0.978	0.298
<i>XHMM3</i>	0.925	0.893	0.030	0.516	0.285	0.059
<i>HMM_{NormOut}</i>	0.326	0.500	0.731	0.515	0.399	0.244

Table 2: Performance of Fall Detection methods (4 states). For *XHMM3* (#states=#labelled activities + 1 state for unseen fall).

6.2. Training with fall data

In this experiment, we compare several supervised classification algorithms for fall detection under two scenarios (a) when full data for falls is available (b) when small amount of fall data is available during training and is gradually increased. The latter experiment simulates a scenario when we may have few fall data to begin with. We simulate this scenario by supplying a controlled amount of fall data during the training phase and train the supervised classifiers by randomly choosing 1, 2, 4, 6, 8, 10, 25, and 50 falls samples from the full fall data. To avoid classification bias due to random choice of fall data, we run this experiment 10 times (per LOOCV fold) and report the average value of the performance metrics. We use supervised version of the *XHMMs* presented earlier. *HMM1_{sup}* is similar to *XHMM1*, where each normal activity is modelled by a separate HMM by utilizing full ‘normal’ data for each activity; however, due to the presence of fall data a separate HMM is trained for fall events. *HMM2_{sup}* is similar to *XHMM2*, where the full ‘normal’ activities are modelled by a general HMM and a separate HMM is trained to model falls. *HMM3_{sup}* is similar to *XHMM3*; however, in this case a state representing ‘actual’ fall activity is added in the HMM and its parameters are computed from the labelled fall data. The other two supervised classifiers we use are Random Forest (*RF*) and Support Vector Ma-

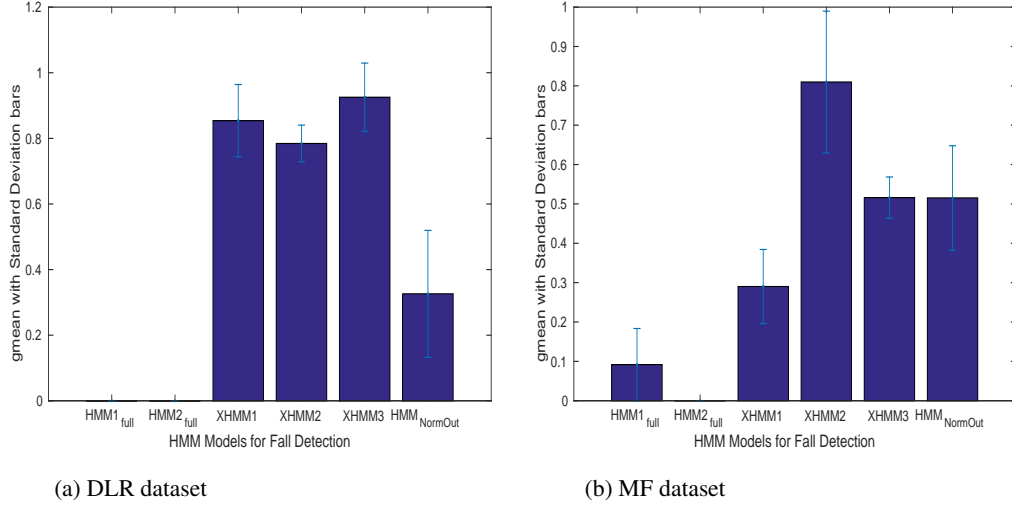



Figure 3: *gmean* with error bars across all subjects for DLR and MF datasets

chine (*SVM*). The ensemble size in *RF* is set to 200, where each decision (or split) in each tree is based on a single, randomly selected feature [5]. For *SVM* classifier, a Gaussian kernel is used with width equals to 10.


Method	DLR			MF		
	<i>gmean</i>	<i>FDR</i>	<i>FAR</i>	<i>gmean</i>	<i>FDR</i>	<i>FAR</i>
$HMM1_{sup}$	0.768	0.719	0.054	0.489	0.259	0.038
$HMM2_{sup}$	0.601	0.533	0.087	0.925	0.939	0.084
$HMM3_{sup}$	0.938	0.908	0.021	0.969	0.988	0.045
<i>RF</i>	0.622	0.496	0.001	0.962	0.937	0.012
<i>SVM</i>	0.929	0.885	0.015	0.985	0.994	0.025

Table 3: Supervised Fall Detection with full training data for falls and all normal activities (Compare with Table 2).

Table 3 shows the LOOCV results for both the datasets. For the MF dataset, the performance improvements in all the *XHMM* based classifiers in comparison

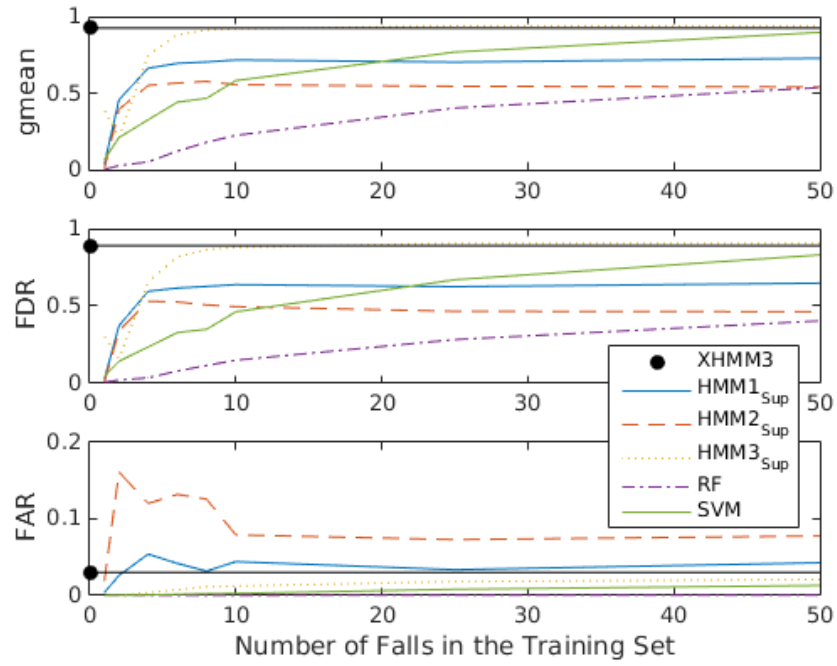

(a) DLR dataset

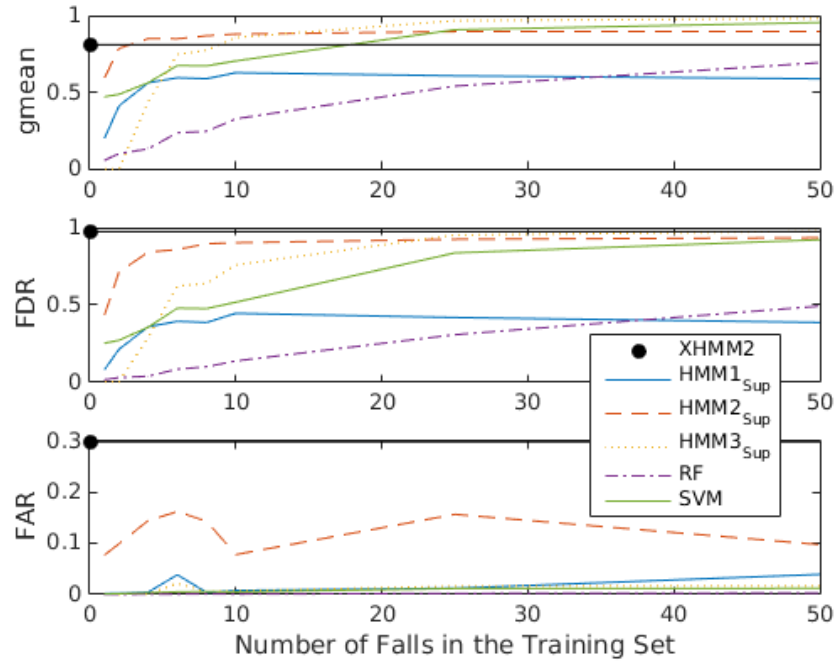

(b) MF dataset

Figure 4: Effect of varying the amount of fall data in supervised learning. Two best performing X-Factor approaches are shown on the y-axis corresponding to zero training data (compare with Table 2).

to their counterparts that are trained in the absence of falls, with all the classifiers except $HMM1_{sup}$ gave comparable performance. For the DLR dataset, performance of $HMM1_{sup}$ and $HMM2_{sup}$ is worse than when no training data for falls is used, whereas $HMM3_{sup}$ show improvement with equivalent performance as SVM . The RF classifier gave intermediate results. Figure 4a and 4b show the performance of supervised classifiers when the fall data is incremented during the training phase for the DLR and MF dataset. All the supervised classifiers perform worse when the training data for falls is very small. Figure 4a shows that as the number of samples in the training data for falls increase, $HMM3_{sup}$ and SVM starts to perform better than other classifiers but provides equivalent performance to $XHMM3$ (shown by \bullet on the y-axis representing no training data for falls). The performance of $XHMM3$, which requires no fall data for training is much better than its supervised counterpart ($HMM3_{sup}$) when a small number of training samples for falls is available. Figure 4b shows that the performance of $HMM2_{sup}$ starts to improve when some fall data are added in the training set for MF dataset, whereas other classifiers perform worse with limited training samples for falls. $XHMM2$ and $HMM2_{sup}$ with small number of training samples for falls show comparable performance. As the number of fall samples increase in the training set, $HMM3_{sup}$ and SVM outperform other methods.

Both the experiments on the DLR and MF datasets suggest that as the number of fall samples increase in the training set, the performance of supervised classifiers improved. However, when they are trained on very limited fall data, their performance is worse in comparison to the proposed models that did not observe falls before. The results from the study of Stone and Skubic [5] show that only 9 actual falls were obtained over a combined nine years of continuous activity data in realistic setting, which highlights the rarity of fall occurrence and consequently the difficulty in training supervised classifiers on abundant fall data. Moreover, supervised methods *cannot* handle training the classifiers in the absence of falls, whereas the proposed X-factor approaches can learn in the absence of training data for falls and identify them with high *gmean* and *FDR*.

6.3. Are outliers representative of proxy for falls?

Section 4 assumes that the outlier sequences present in the normal activities can be used as a proxy for falls to estimate the parameters ξ . We conduct an experiment to evaluate the validity of this assumption. We used the supervised HMMs ($HMM1_{sup}$ and $HMM2_{sup}$), with the only difference that they are trained on “non-fall” activity (i.e. obtained after removing outliers from the normal data) and during the testing phase we present the “outliers” to the classifier instead of normal and fall data. The idea is that some of the outliers that are rejected by the normal activities will be classified as falls as they differ from the normal activities or the general non-fall concept due to inadvertent sensor artifacts.

$HMM1_{sup}$. For the DLR dataset, the outliers of normal activities ‘Jumping’ and ‘Running’ are most of the time classified as ‘Falls’, the outliers from the activities ‘Walking’ and ‘Lying’ are sometimes classified as falls, whereas outliers from ‘Sitting’ and ‘Standing’ are mostly classified as non-falls. This provides evidence that some of the short term dynamic activities can have variations and may not be identified correctly in their respective classes. Similar experiments on the MF dataset show that only the step-in car activity’s outliers are classified as falls and the rest of the outliers of other “non-fall” activities are classified as non-falls.

$HMM2_{sup}$. For the MF dataset, the outliers are mostly classified as falls and for the DLR dataset, they are classified as non-falls.

Based on the above experiments, we can conclude that in the absence of fall data during training, rejected outliers from the normal activities can be used as a proxy for falls, provided they are very different from the samples of normal activities or the general concept of normal activity. However, it is to be noted that since these rejected outliers are not actual falls and only some of them are similar to falls, this may increase FDR with an increase in FAR in the proposed $XHMM$ s.

7. Conclusions and Future Work

The lack of sufficient data for falls can adversely affect the performance of supervised fall detection classifiers. Moreover, the supervised classification methods cannot

handle the realistic scenario when no training data for falls is available. In this paper, we present three ‘X-factor’ HMM based fall detection approaches that learn only from the normal activities captured from a body-worn sensor. To tackle the issue of no training data for falls, we introduced a new cross-validation method based on the inter-quartile range of log-likelihoods on the training data that rejects spurious data from the normal activities, treats them as proxies for unseen falls and helps in optimizing the model parameter. The results show that two of the XHMM methods show high detection rates for falls in person and placement of sensor independent manner. We showed that the traditional method of thresholding with HMM on full normal data set as maximum of negative log-likelihood to identify unseen falls is not the right approach for this problem. We also show that supervised classifiers perform poorly with few training samples for falls, whereas in comparison the proposed methods show high performance in the absence of training data for falls. An important extension of the proposed techniques is the realization of an online fall detection system, which can begin with X-factor models as initial representative model for unseen falls and incrementally adapts its parameters as it starts identifying some falls.

References

References

- [1] G. Acampora, D. Cook, P. Rashidi, A. Vasilakos, A survey on ambient intelligence in healthcare, *Proceedings of the IEEE* 101 (12) (2013) 2470–2494.
- [2] R. Igual, C. Medrano, I. Plaza, Challenges, issues and trends in fall detection systems, *BioMedical Engineering OnLine* 12 (1) (2013) 1–24.
- [3] CDC, Falls in nursing homes, <http://www.cdc.gov/HomeandRecreationalSafety/Falls/nursing.html>, accessed on 15th June 2016.
- [4] G. Debar, P. Karsmakers, M. Deschodt, E. Vlaeyen, E. Dejaeger, K. Milisen, T. Goedem, B. Vanrumste, T. Tuytelaars, Camera-based fall detection on real

- world data, in: *Outdoor and Large-Scale Real-World Scene Analysis*, Vol. 7474 of *Lecture Notes in Computer Science*, Springer Berlin Heidelberg, 2012, pp. 356–375.
- [5] E. Stone, M. Skubic, Fall detection in homes of older adults using the microsoft kinect, *Biomedical and Health Informatics, IEEE Journal of* 19 (1) (2015) 290–301.
 - [6] D. Kulić, W. Takano, Y. Nakamura, Incremental learning, clustering and hierarchy formation of whole body motion patterns using adaptive hidden markov chains., *The International Journal of Robotics Research* 27 (7) (2008) 761–784.
 - [7] S. S. Khan, M. E. Karg, D. Kulić, J. Hoey, X-factor HMMs for detecting falls in the absence of fall-specific training data, in: L. P. et al. (Ed.), *Proceedings of the 6th International Work-conference on Ambient Assisted Living (IWAAL 2014)*, Vol. 8868, Springer International Publishing Switzerland, Belfast, U.K., 2014, pp. 1–9.
 - [8] M. Mubashir, L. Shao, L. Seed, A survey on fall detection: Principles and approaches, *Neurocomput.* 100 (2013) 144–152.
 - [9] B. Kwolek, M. Kepski, Human fall detection on embedded platform using depth maps and wireless accelerometer, *Computer methods and programs in biomedicine* 117 (3) (2014) 489–501.
 - [10] A. Bourke, G. Lyons, A threshold-based fall-detection algorithm using a bi-axial gyroscope sensor, *Medical Engineering and Physics* 30 (1) (2008) 84 – 90.
 - [11] S. S. Khan, M. G. Madden, One-class classification: taxonomy of study and review of techniques, *The Knowledge Engineering Review* 29 (2014) 345–374.
 - [12] N. Thome, S. Miguet, A hhmm-based approach for robust fall detection, in: *ICARCV, IEEE*, 2006, pp. 1–8.
 - [13] X. Luo, T. Liu, J. Liu, X. Guo, G. Wang, Design and implementation of a distributed fall detection system based on wireless sensor networks, *EURASIP Journal on Wireless Communications and Networking* 2012 (2012) 1–13.

- [14] M. Tokumitsu, M. Murakami, Y. Ishida, An adaptive sensor network for home intrusion detection by human activity profiling, *Artificial Life and Robotics* 16 (1) (2011) 36–39.
- [15] H. Cheng, L. Haiyong, F. Zhao, A fall detection algorithm based on pattern recognition and human posture analysis, in: *IET International Conference on Communication Technology and Application*, 2011, pp. 853–857.
- [16] T. Zhang, J. Wang, L. Xu, P. Liu, Fall detection by wearable sensor and one-class svm algorithm, in: *Intelligent Computing in Signal Processing and Pattern Recognition*, Vol. 345, Springer Berlin Heidelberg, 2006, pp. 858–863.
- [17] M. Yu, S. Naqvi, A. Rhuma, J. Chambers, Fall detection in a smart room by using a fuzzy one class support vector machine and imperfect training data, in: *ICASSP*, 2011, pp. 1833–1836.
- [18] M. Popescu, A. Mahnot, Acoustic fall detection using one-class classifiers, in: *Annual International Conference of the IEEE EMBC*, 2009, pp. 3505–3508.
- [19] C. Medrano, R. Igual, I. Plaza, M. Castro, Detecting falls as novelties in acceleration patterns acquired with smartphones, *PloS one* 9 (4) (2014) e94811.
- [20] L. Rabiner, A tutorial on hidden markov models and selected applications in speech recognition, *Proceedings of the IEEE* 77 (2) (1989) 257–286.
- [21] J. A. Quinn, C. K. Williams, N. McIntosh, Factorial switching linear dynamical systems applied to physiological condition monitoring, *IEEE Transactions on PAMI* 31 (9) (2009) 1537–1551.
- [22] S. S. Khan, M. E. Karg, J. Hoey, D. Kulić, Towards the detection of unusual temporal events during activities using hmms, in: *SAGAWARE - Proceedings of the 2012 ACM Conference on Ubiquitous Computing, UbiComp '12*, ACM, 2012, pp. 1075–1084.
- [23] P. Smyth, Markov monitoring with unknown states, *Selected Areas in Communications, IEEE Journal on* 12 (9) (1994) 1600–1612.

- [24] M. J. V. Nadales, Recognition of human motion related activities from sensors, Master's thesis, University of Malaga and German Aerospace Cener (2010).
- [25] G. Vavoulas, M. Pediaditis, E. Spanakis, M. Tsiknakis, The mobifall dataset: An initial evaluation of fall detection algorithms using smartphones, in: Bioinformatics and Bioengineering (BIBE), 2013 IEEE 13th International Conference on, 2013, pp. 1–4.
- [26] L. G. M. de la Vega, S. Raghuraman, A. Balasubramanian, B. Prabhakaran, Exploring unconstrained mobile sensor based human activity recognition, in: 3rd International Workshop on Mobile Sensing, 2013.
- [27] D. A. Winter, Biomechanics and motor control of human movement, John Wiley & Sons, 2009.
- [28] N. Ravi, N. Dandekar, P. Mysore, M. L. Littman, Activity recognition from accelerometer data, in: Proceedings of the 17th conference on Innovative applications of artificial intelligence - Volume 3, IAAI'05, AAAI Press, 2005, pp. 1541–1546.
- [29] A. M. Khan, Y.-K. Lee, T.-S. Kim, Accelerometer signal-based human activity recognition using augmented autoregressive model coefficients and artificial neural nets, in: Engineering in Medicine and Biology Society, 2008. EMBS 2008. 30th Annual International Conference of the IEEE, IEEE, 2008, pp. 5172–5175.
- [30] M. Ermes, J. Parkka, L. Cluitmans, Advancing from offline to online activity recognition with wearable sensors, in: 2008. 30th Annual International Conference EMBS, 2008, pp. 4451–4454.
- [31] L. Bao, S. S. Intille, Activity recognition from user-annotated acceleration data, in: A. Ferscha, F. Mattern (Eds.), Pervasive, Vol. 3001 of Lecture Notes in Computer Science, Springer, 2004, pp. 1–17.
- [32] M. Karg, W. Seiberl, F. Kreuzpointner, J. P. Haas, D. Kuli, Clinical gait analysis: Comparing explicit state duration hmms using a reference-based index, IEEE

Transactions on Neural Systems and Rehabilitation Engineering 23 (2) (2015)
319–331.

- [33] Z. He, L. Jin, Activity recognition from acceleration data based on discrete cosine transform and svm, in: SMC, IEEE, 2009, pp. 5041–5044.